## UNCLASSIFIED

# AD 414103

### DEFENSE DOCUMENTATION CENTER

**FOR** 

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

MOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY DDC - AS AD No. 41410

#### U.S. ARMY

Technical Memorandum 18-62

STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION

II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY

Charles Fried

AMCMS Code 5016, 11, 844


October 1962

#### **HUMAN ENGINEERING LABORATORIES**



ABERDEEN PROVING GROUND,
MARYLAND

414103

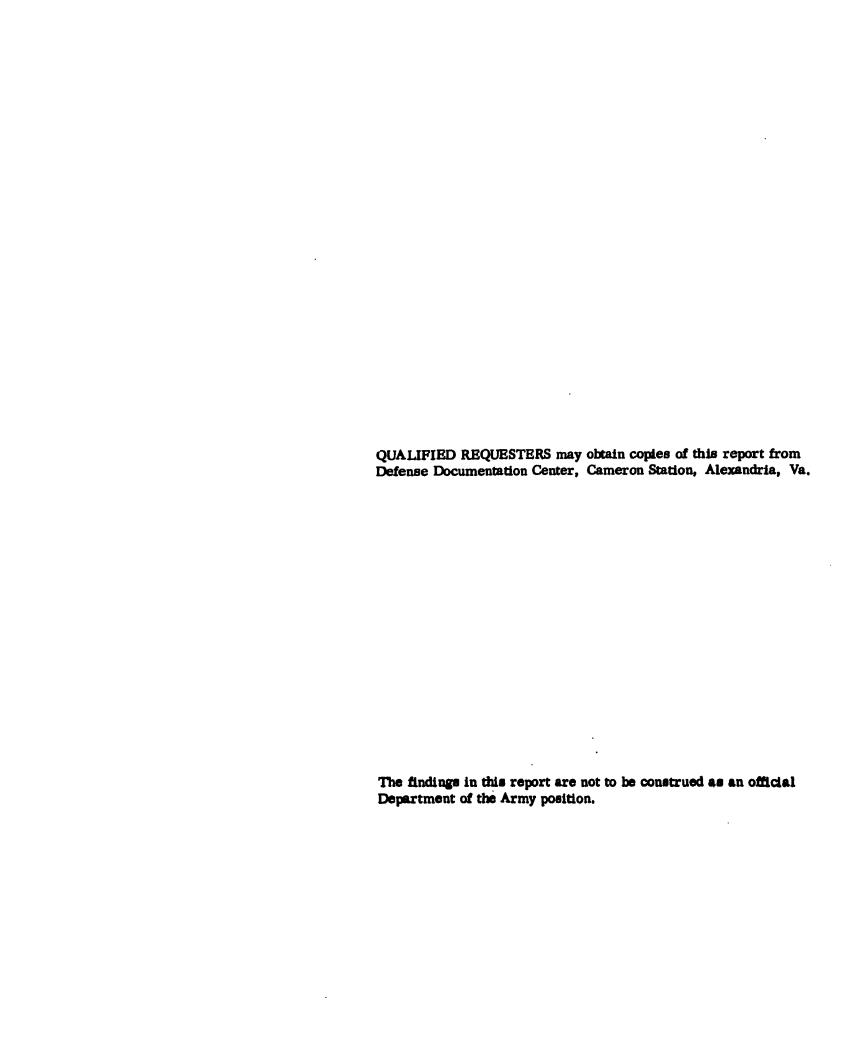

# STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY

#### Charles Fried

Technical Assistance

Joseph P. Delaney William S. Faccidomo

October 1962

Technical Director

USA Human Engineering Laboratories

U. S. ARMY HUMAN ENGINEERING LABORATORIES
Aberdeen Proving Ground, Maryland

#### ABSTRACT

A proposed method for reducing threshold for perceived motion, by adding the force of induced movement to true movement, was explored. Induced movement was evidenced by (1) subjects reporting movement when no actual movement occurred, and (2) the increase in threshold when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occur, because, presumably, the subjects attempted to compensate for the influence of induced movement.

#### CONTENTS

ABSTRAC	CT	iii
INTRODU	UCTION	1
METHOD	·	3
	paratus and Procedure	3 5
RESULT	s	5
DISCUSS	SION	10
Ilh	umination	10
Dia	rection of Movement	10
Mo	ovement vs. Stationary Background	10
SUMMAE	RY	12
REFERE	ENCES	13
FIGURE	S	
1.	View Through Hood Placed in Front of the	_
2.		2
3.	a Test Trial	4
TABLES	•	
, 1.		
2.		6
	Differences Between the Six Experimental Condition Means	7
3.	Means and Variances for Six Experimental	

#### STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION

#### II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY

#### INTRODUCTION

The detection of movement has important implications in a number of military areas. This series of studies has attempted to isolate methods which will reduce the threshold of perceived motion below values ordinarily obtained.

The first report in this series (3) examined the effects of aperture dimension and proximity of a reference line on motion threshold. The results indicated that a reduction in aperture size will, for the smaller apertures, reduce the threshold. This result, in turn, appears to be a function of the distance of the moving object from a reference line, if the reference line is apparent to the subject.

The present study explores the possibility of applying a variation of the induced motion phenomenon to reduce threshold values.

Induced movement was first studied at length by Duncker (1) who distinguished it from two movement "types", real and phi movement. His apparatus for these studies consisted essentially of a dot in a surrounding frame of reference. When the frame was moved, the stationary dot appeared to move in the opposite direction. This phenomenon did not occur, however, when the subject "referred" the dot to a stationary frame.

Additional studies of induced movement by Oppenheimer (5) were concerned with the characteristics of perceptual objects most likely to become the frame of reference. Koffka (4) summarized this research and concluded that if one of two objects had the phenomenal function of framework for the other, it would be seen as stationary while the other moved, regardless of which object was actually moved.

Fig. 1. VIEW THROUGH HOOD PLACED IN FRONT OF THE DISPLAY

#### **METHOD**

#### Apparatus and Procedure

A circular black dot, 4.76-mm. diameter, was painted on a sheet of transparent plastic and attached to a movable belt (Fig. 1). The belt was accelerated at a constant rate of .035 cm/sec<sup>2</sup> from zero velocity to a speed at which the subject (S) reported it as moving. A timer was started at the same moment that the transparent plastic began to move. The S indicated that he perceived the dot as moving by pressing a reaction button that stopped the belt and the timer. The experimenter, after recording the time elapsed, reset the timer and recentered the dot in the middle of the aperture.

The aperture was 8 x 8 cm., and the background was a white expanse, interrupted at 7.94-mm. intervals by 1.59-mm.-thick black vertical lines. Two fluorescent lamps gave background illumination of 30.13 millilamberts (ml.).

Chin and forehead rests were mounted in front of the hood to insure that Ss' eyes were 35.56 cm. from the display. The S viewed a dot in the center of a square aperture (Fig. 2). He could not see the rest of the apparatus.

To insure light adaptation, Ss viewed the display for a minimum of three minutes prior to the first test trial. During the adaptation period instructions were read, and practice trials were given. During the practice and test trials, Ss were required to fixate on the dot.

The method of limits, with ascending velocities only, was used to determine the threshold. Descending-velocity series would have been influenced by any motion aftereffects. The background remained stationary except in the induced movement trials, where it moved at a constant velocity of .271 cm./sec.

To prevent the  $\underline{S}$  from responding to the time elapsed from the moment the belt began moving until he believed he should see motion, a number of dummy switches, starting audible motors, were turned on in the intervals between, and during, the test trials.

Fig. 2. SUBJECT AND EXPERIMENTER IN POSITION FOR A TEST TRIAL

Two blocks of five trials of each of the six conditions (two illuminations, stationary and moving backgrounds, and two directions of movement) -- a total of 60 trials -- were presented to each  $\underline{S}$ . The blocks were given in a different randomized sequence for each  $\underline{S}$  to minimize any systematic fatigue or learning effects.

#### Subjects

The Ss were 24 enlisted men of the Special Troops Battalion, Aberdeen Proving Ground, Md. All Ss had minimum near visual acuity scores of 20/20, as determined by Ortho-Rater test. The ages of the Ss ranged from 19 to 35.

Prior to the study, each  $\underline{S}$  was tested on a simple reaction time device. The device consisted of a vertical line in the same position as the dot described above. The line was tilted from the vertical to a  $45^{\circ}$  position almost instantaneously by a spring which simultaneously started a timer. The  $\underline{S}s$  were required to respond as early as possible to the line movement in three test trials. The mean of these test trials was used as the  $\underline{S}$ 's reaction time.

#### RESULTS

The experimenter recorded the time that elapsed from the start of the belt's motion until  $\underline{S}$  indicated that he saw the dot moving. The mean reaction time for each  $\underline{S}$  was then subtracted from the time scores, and these scores were converted into velocity values. The ten velocity values for each experimental condition were averaged for each  $\underline{S}$ , and this mean value was used in the analysis.

After completing the analysis of variance for randomized blocks with each S regarded as a block in the design (2), Duncan's Multiple Range Test was used to evaluate the differences between the means (Table 1 and Table 2).

TABLE 1

Analysis of Variance for Six Experimental Conditions with 24 Subjects in Each Condition

Source of Variance	Sum of Squares	df	Mean Square	; F
Between Conditions	32, 047. 44	5	6, 409. 49	15.10*
Between Subjects	91, 030. 86	23	3,957.86	9.32*
Conditions x Subjects	48, 804. 85	115	424. 39	
TOTAL	171, 883. 15	143		

<sup>\*</sup> p <.01

At the .05 level of confidence, there was no significant difference between the room-illuminated, unrestricted field-of-view condition, and the low-illumination, restricted field-of-view condition. This finding was true for all background movement conditions, i.e., stationary, motion opposite to dot, and motion in same direction as dot.

Increasing room illumination and providing S with a larger field of view, with a presumably stable frame of reference, did not influence the threshold.

There was a significant difference between the two directions of background movement. The threshold was significantly higher when the background and the dot moved in the same direction.

In comparing the effects of background movement, irrespective of direction, a moving background raised the threshold over the values obtained with a stationary background. There is a greater increase in threshold when the background movement is opposed to the dot's direction of movement (Fig. 3).

TABLE 2

Duncan's Multiple Range Test Applied to the Differences Between the Six Experimental Condition Means

	Stationary Ba	Background	Moving	Moving Background	ckground Mording in S	ground Mouting in Same Direction
	Unrestricted Field	Restricted Field	Unrestricted Field	Restricted Field	Restricted Field	Restricted Unrestricted Field Field
Means	(1)	(2)	(3)	(4)	3	(0)
(1) 33.82		4.01	17.77	22.08	36.08	40,30
(2) 37.83			13,76	18.07	32.07	36, 29
(3) 51, 59			-	4,31	18.31	22, 53
(4) 55.90	į				14.00	18.22
(5) 69.90						4.22
(6) 74.12						
Means	33.82	37.83	51, 59	55, 90	69°69	74, 12

(Any two treatment means not underscored by the same line are significantly different at or beyond the .05 level.)

TABLE 3

Means and Variances for Six Experimental Conditions

	Stationary Ba	y Background		Moving Background	ckground	
			Moving in Opposite Directions	site Directions	Moving in Sa	Moving in Same Direction
Means	Unicatricted Restricted Field	Restricted Field	Unrestricted Field	Restricted Field	Restricted	Restricted Unrestricted
						777
Mean	33, 82	37, 83	51, 59	55.90	69° 60	74.12
Variance	308, 35	307, 30	1,084,38	1,004.26	1, 805, 40	1, 315, 51
æ	24	24	24	24	24	24
						,

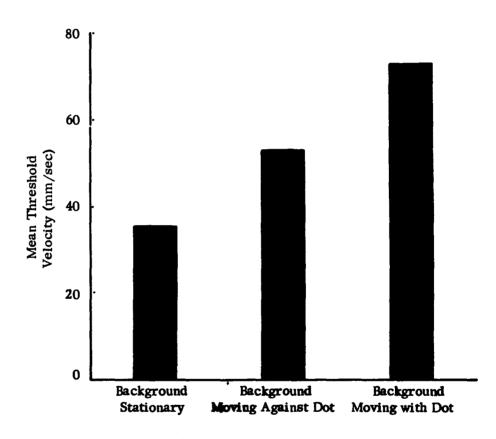


Fig. 3. MEAN THRESHOLD VELOCITIES FOR MOVING DOT AGAINST A STATIONARY AND MOVING BACKGROUND

#### DISCUSSION

#### Illumination

This variable was included to insure that any findings about background movement would not be limited to the restricted field-of-view conditions commonly used in investigating perceptual thresholds. Duncker (1) found that the introduction of stable frames of reference, in addition to the one that caused the induced motion, would invariably eliminate or reduce the induced motion effect. When the stable frame was visible, his Ss reported that they "referred" the dot to the non-moving frame. As a result, they did not see any movement. However, one difficulty is that it is not always possible to predict when the Ss will "refer" the dot to alternate frames. It is conceivable that the Ss will use the most striking and "impressive" frame of reference available. Since moving vertical lines are attentiongetting even in the brightly lit room, a S may persist in using them as a reference for the moving dot. Duncker, however, used relatively neutral cardboard squares to create the induced motion illusion. These squares were not effective when the S was able to see the entire room and use the more "impressive", stationary walls for the frame of reference.

#### Direction of Movement

The direction of background motion significantly influenced the threshold, and thresholds were consistently higher when the direction of movement of the background and dot were the same. This effect could be predicted from the direction in which induced movement operates, i.e., the dot is always "moved" opposite in direction to the background's motion. When the directions of the two movements are opposed and the forces of actual and induced motion "interfere" with one another, a larger amount of real movement is necessary before a threshold value is reached. On the other hand, when the background is moving in a direction counter to the dot's motion, the forces of the actual and induced motion are aligned and the threshold is lowered.

#### Movement vs. Stationary Background

A background of moving vertical lines significantly increased the threshold, as compared to when the vertical lines were stationary. The threshold should be increased when the background moves counter to the dot and the forces of real and induced motion are in conflict. When the

forces of real and induced motion are identical in direction, it might be expected that phenomenal movement would be increased and the threshold would be reached with a smaller amount of real movement.

However, an unexpected increase in threshold occurred when the back ound moved against the dot, although the increase was not so large as when the background moved with the dot. This result may be attributed to a procedure used in the study. For all movement trials, the background remained in motion, even during the period between tests when the dot was not in motion. This control was necessary because Ss might respond solely to the hackground's motion if it started at the same time that the dot was placed in motion. Unfortunately, this procedure led to a number of reports that the stationary dot was moving, because of the effects of induced motion, The Ss were cautioned repeatedly to respond only when they were certain that the dot moved and this instruction may have made them overly cautious about reporting motion. Caution is an organismic variable, and it may be expected that the experimental conditions of moving background vs. stationary background will be reflected in the variances of the two groups, with a significant increase in variance for the moving background (note discussion by Edwards [2], p. 110).

The means and variances for the six experimental conditions are presented in Table 3. F tests for homogeneity of variance were performed between all conditions, contrasting stationary and moving background. In all four of the possible comparisons, the variance for moving background was significantly greater at the .01 level of confidence. This finding supports the view that an increase in caution was responsible for the increased threshold under conditions of background movement.

#### SUMMARY

The effects of induced motion were added to actual motion of a dot to ascertain if the threshold for motion could be reduced to levels below those ordinarily obtained.

Three comparisons were made: (1) the effects of a background of movement on the threshold for movement; (2) for the movement trials, a comparison of the direction of movement of the background on the threshold, i.e., in a direction opposite to or similar to the dot's movement; (3) a restricted and darkened field of view, as compared to an unrestricted view and a room illumination of 102.22 ml. A hood, placed in front of the display, was used to restrict and darken the field of view. This last variable is of interest, as Duncker (1) had found that inclusion of stable frames of reference in the field of view reduced the induced-motion effect.

Room illumination and field of view had no effects upon threshold. A moving background resulted in sizable induced-motion effects, which served to raise the threshold when the induced motion was opposed to the actual motion. When the directions of the actual and induced movement were the same, the threshold was also increased. An explanation in terms of the Ss'caution in reporting motion was offered to account for this last result.

#### REFERENCES

- 1. Duncker, K. Uber Induzierte Bewegung. Psych. Forsch., 1929, 12, 180-259.
- 2. Edwards, A. L. Experimental Design in Psychological Research. New York: Rinehart and Co., 1960.
- 3. Fried C. Studies of the Perceived Threshold for Motion, I. Effects of Aperture Dimension on Threshold Velocity. U. S. Army Human Engineering Laboratories Technical Memorandum 6-62, Feb. 1962, Aberdeen Proving Ground, Md.
- 4. Koffka, K. Principles of Gestalt Psychology. New York: Harcourt, Brace and Company, 1935.
- 5. Oppenheimer, E. Optiche Versuch urer und Bewegung. Psych. Forsch., 1934, 20, 1-46.

#### **DISTRIBUTION LIST**

Headquarters	Commanding Officer	Headquarters .
U. S. Army Materiel Command	USA Medical Research Laboratory	U. S. Army Electronics R&D Laborator
Washington 25, D. C.	Fort Knox, Kentucky	Fort Monmouth, New Jersey
ATTN: AMCRD-RS 1	ATTN: Psychology Division 1	
AMCRD-DE 1	Library 1	
		Commanding General
U. S. Army Materiel Command Board	Director of Research	U. S. CONARC
Aberdeen Proving Ground, Md.	U. S. Army Avn HRU	Fort Monroe, Virginia 1
Hdg. 3072	P. O. Box 428	•
_	Fort Rucker, Ala.	CONARC Liaison Office
U. S. Army Test & Evaluation Comman	d ATTN: Librarian 1	
Aberdeen Proving Ground, Md.	- · · · · · · · · · · · · · · · · · · ·	Bidg. 400
Bldg. 3071 1	Commanding Officer	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
•	U. S. Army Artillery CD Agency	Commanding Officer
Dr. J. E. Uhlaner	Fort Sill, Oklahoma 1	Diamond Fuze Laboratories
Director, Research Laboratories	<u>.</u>	Washington 25, D. C.
U. S. Army Personnel Research Office	Commandant	******
Washington 25, D. C.	U. S. Army Artillery & Missile School	ATIN: Tech Reference Sec 1
	Fort Sill, Oklahoma	Commending Offices
U. S. Army Personnel Research Office	ATTN: Director, Dept. of Gunnery 2	Commanding Officer
Washington 25, D. C. 1	2	Directorate of Medical Research
	Commanding General	Edgewood Arsenal, Md.
Director, Army Research Office	U. S. Army Missile Command	ATTN: Psychol & Human Engr Br 1
Office, Chief Research & Development	Redstone Arsenal, Ala.	USA Environmental Hygiene
	A TOTAL TO THE TOTAL TOT	Agency 2
Washington 25, D. C.	ATIN: Research Library 1	<b>a</b>
ATTN: Human Factors Division 1	AMSMI-RCH (Mr. Graham) 1	Commanding Officer
<b>D</b>	Man da	U. S. Army Munitions Command
Director	Headquarters	Frankford Arsenal
U. S. Army Engineer Rach & Dev Labs	U. S. Army Mobility Command	Philadelphia 37, Pa.
Fort Belvoir, Virginia	Warren, Michigan 1	ATTN: SMUFA-1031/65-1
ATTN: Library 1	••	(HF Engr Br) 1
Human Factors Branch 1	Headquarters	Library (Bldg. 40) 1
	U. S. Army Detroit Arsenal	
Commanding Officer	Warren, Michigan	Commanding Officer
U. S. Army Infantry Agency		U. S. Army Munitions Command
Fort Benning, Ga.	Commanding General	Picatinny Arsenal
	U. S. Army Tank-Automotive Command	Dover, New Jersey
U. S. Army Idantry	Warren, Michigan	ATTN: AMSMU-VC2 (Mr. P. Strauss) 1
Human Research Unit	ATTN: SMOTA-RRS 1	• • • • • • • • • • • • • • • • • • • •
Fort Benning, Ga. 1		Director of Research
,	Commanding General	Training Methods Division
Commanding Officer	U. S. Army Weapons Command	Human Resources Research Office
USA Air Defense CD Agency	Rock Island Arsenal, Illinois	300 North Washington Street
Fort Bliss, Texas	ATTN: AMSWE-TE 1	Alexandria, Va.
	AMSWE-9310-TS	•
Director of Research		Commanding General
USA Air Defense CD Agency	U. S. Army Leadership Human Rach Unit	Quartermaster Rach & Engr Ctr
Human Research Unit	P. O. Box 787	Natick, Mass.
Fort Bliss, Texas	Presidio of Monterey, Calif.	ATTN: Environmental Protection
·	,,	• · · · · · · · · · · · · · · · · · · ·
Commanding Officer	Commanding Officer	Research Division 1
U. S. Army Armor CD Agency	Medical Equipment Development Lab	Commanding Officer
Fort Knox, Kentucky 1	Fort Totten	Springfield Armory
1	Flushing 59, New York	Springfield, Mass.
U. S. Army Armor	1	A TOTAL 1 Times (most
Human Research Unit	Commanding Officer	ATTN: LWDB (PC)
<b></b>	U. S. Army Research Office	Diverton Wales "
Fort Knox, Kentucky 1	Box CM, Duke Station	Director, Walter Reed Army
	Dumbarra M. G	Institute of Research
	•	Walter Reed Army Medical Center
	Commanding Officer	wasnington, D. C.
	Yuma Test Station	ATTN: Neuropsychiatry Div. 1
	Yuma, Arizona	
	ATTN: STEYT-CPP	
	•	

Commanding Officer	Commanding Officer & Director		American Institute for Research	
Watertown Arsenal	Naval Training Devices Center		1808 Adams Mill Road, N.W.	
Watertown 72, Mass.	Port Washington, Long Island		Washington 9, D. C.	
ATTN: AMXMR-9251	1 New York		ATTN: J. T. Hudson	1
	ATTN: Dr. Kenneth Thompson	1		
Commanding Officer	a		American Institute for Research	
Watervliet Arsenal	Commanding Officer		410 Amberson Avenue	
Wateryliet, New York	Office of Naval Research Br Ofc		Pittsburgh 32, Pa.	
ATTN: SWEWV-RDD (Mr. Waugh)	1 495 Summer Street		ATTN: Library	1
Commanding General	Boston, Mass. ATTN: Dir, Bibliographical Service	_	American Institute for Research	
White Sands Missile Range	Proj., Inst. for Appl. Expe		8 West 41st Avenue	
Las Cruces, New Mexico	Psychol, North Hall	.L.	San Mateo, Calif.	
ATTN: Technical Library	1 Tufts College		ATTN: Librarian	٠,
•	1 Medford 55, Mass.	1		· ,1
	- ,	-	American Machine & Foundry Co.	
Ord Liaison Office	U. S. Navy Electronics Laboratory	,	11 Bruce Place	
Army Combat Dev Experimentation Ct			Greenwich, Conn.	
Fort Ord, Calif.	ATTN: Ch, Human Factors Divisio	n 1	ATTN: Human Factors Supv	1
ATTN: LtCol M. D. Burkhead	1		•	_
	RADC (RASH)		The Franklin Institute	
Commanding General	Griffiss AFB, New York	1	20th St. & Ben Franklin Parkway	
U. S. Army Combat Development Com	nmand		Philadelphia 3, Pa.	
Ft. Belvoir, Virginia	Hq ESD (ESAT)		ATTN: Electrical Engr Library	1
ATTN: CDCRE-C (Dr. M. I. Kurke)	1 L. G. Hanscom Field		-	
	Bedford, Mass.	1	ITT Laboratories	
U. S. Army Arctic Test Board			500 Washington Avenue	
U. S. Army R&D Office, Alaska	AMD (AMA)		Nutley 10, New Jersey	
APO 731, Seattle, Washington	Brooks Air Force Base, Texas	1	ATTN: Human Factors Group	1
ATTN: Dr. Emmoran B. Cobb	1		Mounts Common or	
U. S. Army R&D Office, Panama	6570 AMRL (MRP)		Martin Company	
P. O. Drawer 942	Wright-Patterson AFB, Ohio	2	Life Sciences Dept., Engineering I Baltimore 3, Md.	AV.
Ft. Clayton, Canal Zone, Panama	Civil Aeromedical Research Institu	•	ATTN: Dr. Carl C. Clark	3
	1 Federal Aviation Agency	100	Dr. Carro, Carr	3
	Aeronautical Center		The Research Analysis Corporation	
U. S. Military Academy	P. O. Box 1082		6935 Arlington Road	
MP&L	Oklahoma City, Okla.	•	Bethesda, Md.	
West Point, New York	ATTN: Psychol Br	1	ATTN: Library	1
ATTN: LtCol H. A. Buckley	1	_	•	•
-	Defense Documentation Center		Ritchie & Associates, Inc.	
Technical Library	Cameron Station, Va.	10	44 Ludlow Street	
Aberdeen Proving Ground, Md.			Dayton 2, Ohio	1
Bldg. 313	1 Office of Technical Services		•	
	Department of Commerce		Dr. D. W. Conover	
Technical Library, Branch #3, D&PS	Washington 25, D. C.		Mail Zone: 6-169	
Aberdeen Proving Ground, Md.	ATTN: Acquisitions Section	2	General Dynamics/Convair	
Bldg. 400	1		P. O. Box 1950	
Un 1954 Medical DED Commend	Dr. William Lybrand		San Diego 12, Calif.	1
Hq, USA Medical R&D Command Main Navy Building	Special Operations Research Office		M- 31/	
Washington 25, D. C.	The American University		Mr. Wesley E. Woodson	_
	1405 Massachusetts Ave., N.W. 1 Washington 16, D. C.		Mail Zone: 594-50 General Dynamics/Astronautics	•
IN WII ROOM DE	1 washington 10, D. C.	1	5001 Kearny Villa Road	
Commanding Officer	7 60 114 114		San Diego 11, Calif.	
Naval Research Laboratory	Serials Unit		and biogo ii, Cam.	1
4th & Chesapeake Sts., S. W.	Purdue University		Hughes Aircraft Company	
Washington 25, D. C.	Lafayette, Indiana	1	Florence Ave. at Teal St.	
· · · · · · · · · · · · · · · · · · ·	1 University of Michigan		Culver City, Calif.	
	1 Ann Arbor, Michigan		ATTN: Engineering Library	1
	ATTN: Dr. Leonard Uhr	1		
		•	United Aircraft Corporate Systems	Cente
	•		1690 New Britain Avenue	
			Farmington, Conn.	
			ATTN: Human Factor Engr,	
			(Mr. L. Bricker)	1

UNCL  1. Human factors engineering  2. Motion perception	UNCL  1. Human factors engineering  2. Motion per ception
AD  Accession No.  U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION - II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY Charles Fried Technical Assistance: J. P. Delaney, W. S. Facctdomo Technical Assistance: J. P. Delaney, W. S. Facctdomo Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-63 Technical Memorandum 18-63 Technical Memorandum 18-64 AMCMS Code 5016. 11. 844 AMCMS Code 5016. 11. 844 AMCMS Code 5016. 11. 844  A proposed method for reducing threshold for perceived motion, by adding the force of induced movement to true movement, was explored. Induced movement was evidenced by (1) subjects reporting mover-ent when no actual movement. The predicted measurement were identical, did not occur, because, presumably, the subjects attempted to compensate for the influence of induced movement.	Ab Accession No.  U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION - II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY Charles Fried Charles Fried Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-63 Technical Memorandum 18-63 Technical Memorandum 18-63 Technical Memorandum 18-64 AMCMS Code 5016.11.844 A proposed method for reducing threshold for perceived motion, by adding the force of laduced movement was evidenced by (1) subjects reporting movement when to actual movement cocurred, and (2) the increase in threshold when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occur, because, presumably, the subjects attempted to compensate for the influence of induced movement.
UNCL 1. Human factors engineering 2. Motion perception	UNCL  1. Human factors engineering 2. Modon perception
AD Accession No.  U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUXIES ON THE PERCEPTUAL THRESHOLD FOR MOTION - II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY Charles Fried Charles Fried Charles Fried Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-62 Technical Memorandum 18-62 AMCMS Code 5016.11. 844  A proposed method for reducing threshold for perceived motion, by adding the force of induced movement to true movement, was explored, induced movement was evidenced by (1) subjects reporting movement when no actual movement cocurred, and (2) the increase in threshold when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occur, because, presumably, the subjects attempted to compensate for the influence of induced movement.	AD  Accession No.  U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR MOTION - II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY Charles Fried Technical Assistance: J. P. Delaney, W. S. Facedomo Technical Memorandum 18-62  Unclassified AMCAS Code 5016.11.844  A proposed method for reducing threshold for perceived motion, by adding the force of induced movement was evidenced by (1) subjects reporting movement was evidenced by (1) subjects reporting movement when the treaction of its fifthence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occurr, because, presumably, the subjects attempted to compensate for the influence of induced movement.

-

.

AD Accession No.	UNCT	AD Accession No.	UNCL
U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR	1. Human factors engineering	U. S. Army Human Engineering Laboratories Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR	1. Human factors engineering
MOTION - II. EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY	2. Motion	EFFECTS OF INDUCT	2. Motion
Charles Fried October 1962 Technical Assistance: J. P. Delaney, W.S. Faccidomo	perception	Charles Fried Crober 1962 Technical Assistance: J. P. Delaney, W. S. Faccidomo	perception
Technical Memorandum 18-62 Unclassified AMCMS Code 5016, 11, 844		Technical Memorandum 18-62 Unclassified AMCMS Code 5016,11,844	
A proposed method for reducing threshold for perceived motion, by adding the force of induced movement to true movement, was explored, induced movement was evidenced by (1) adjects reporting movement when no actual movement occurred, and (2) the increase in threshold when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occur, because, presumably, the subjects attempted to compensate for the influence of		A proposed method for reducing threshold for per- ceived motion, by adding the force of induced movement to true movement, was explored. Induced movement was evidenced by (1) subjects reporting movement when no actual movement occurred, and (2) the increase in thresh- old when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of actual and induced movement were identical, did not occur, because, presumably, the sub- jects attempted to compensate for the influence of	
loed movement.		INDUCED INVESTMENT.  A P. A A P. A A P. A A A A A A A A A A A	ION
AD Accession No.	ONCE	S. Army Human Enginee	
O. S. Almy remen industrial actions are considered in the control of the control	I. Human factors engineering	Aberdeen Proving Ground, Maryland STUDIES ON THE PERCEPTUAL THRESHOLD FOR	1. Human factors engineering
MOTION - II. EFFECTS OF INDUCED MOTION ON		MOTION - II, EFFECTS OF INDUCED MOTION ON THRESHOLD VELOCITY	2. Motion
THRESHOLD VELOCITY Charles Fried Technical Assistance: J. P. Delaney, W. S. Faccidomo	2. Motion perception	Charles Fried October 1962 Technical Assistance; J. P. Delaney, W. S. Faccidomo	
Technical Memorandum 18-62 Unclassified AMCMS Code 3014, 11, 844		Technical Memorandum 18-62 Unclassified AMCMS Code 5016,11,844	
A proposed method for reducing threshold for per- ceived motion, by adding the force of induced movement to true movement, was explored. Induced movement was evidenced by (1) subjects reporting movement when no actual movement occurred, and (2) the increase in thresh- old when the direction of its influence was opposed to actual movement. The predicted threshold reduction,	· · · · · · · · · · · · · · · · · · ·	A proposed method for reducing threshold for per- ceived motion, by adding the force of induced movement to true movement, was explored. Induced movement was evidenced by (1) subjects reporting movement when no actual movement occurred, and (2) the increase in thresh- old when the direction of its influence was opposed to actual movement. The predicted threshold reduction, when the direction of sortial and induced movement were	
When the direction of actual and induced movement were identical, did not occur, because, presumably, the subjects attempted to comprehense for the influence of induced movement.		identical, did not occur, because, presumably, the sub- jects attempted to compensate for the influence of induced movement.	